

Push Button Switch LC83 Series



SPECIFICATION

- Electrical Rating : 15A 250VAC/125VAC(UL)
10(4)A 250VAC(VDE)
- Mechanical life: Over 30000 cycles
- Electrical life: Over 10000 cycles
- Contact resistance: <math><20\text{m}\Omega</math>
- Insulation resistance: >1000M Ω
- High voltage resistance: >1500V 1 min.
- Ambient temperature: Terminal side -20 to +85 $^{\circ}\text{C}$
Actuating side -20 to +55 $^{\circ}\text{C}$
- Storage temperature: -30 to +80 $^{\circ}\text{C}$ Max
- Atmospheric humidity: Max.85%
- Actuating force: 3 to 6N(Depends on different switch function)
- Flammability: 94V-2
- Temperature rise at the terminal: Max 30 $^{\circ}\text{C}$ (UL1054)
- Solder ability of terminal: Max 350 $^{\circ}\text{C}$, 3s




MATERIALS

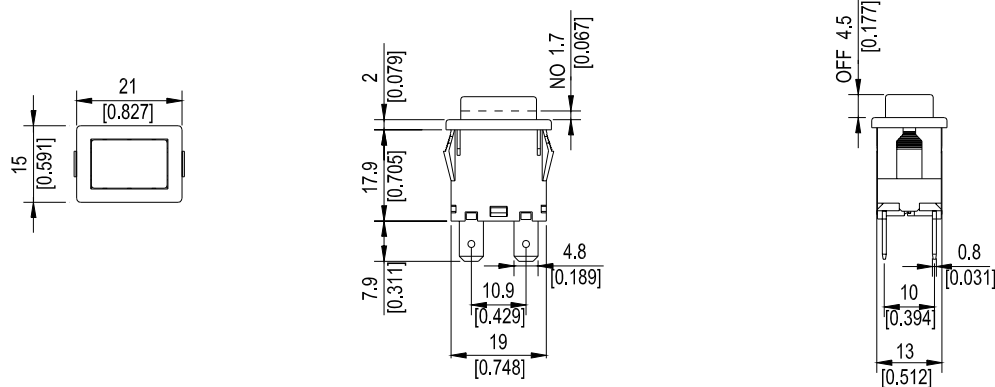

- Housing: PA66
- Rocker: PC
- Contacts: Silver alloy
- Terminal: Copper silver plated
- Spring: SUS
- Movable Arm: Copper silver plated
- Lamp: Neon Lamp, Tungsten Lamp
- Bracket: PA66

HOW TO ORDER

LC83 Series	01 Switch Function	K Housing Color	K Actuator Color	E Marking	T Terminal Type	0 Lamp Voltage	C Safety Approval																																																											
Series				E No Marking																																																														
	<table border="1"> <tr><td>01</td><td>ON - OFF</td></tr> <tr><td>02</td><td>(ON) - OFF</td></tr> <tr><td>03</td><td>ON-OFF (with lamp)</td></tr> <tr><td>04</td><td>(ON) - OFF (with lamp)</td></tr> <tr><td>05</td><td>ON - OFF</td></tr> <tr><td>06</td><td>(ON) - OFF</td></tr> <tr><td>07</td><td>ON-OFF (with lamp)</td></tr> <tr><td>08</td><td>(ON)-OFF (with lamp)</td></tr> </table>	01	ON - OFF	02	(ON) - OFF	03	ON-OFF (with lamp)	04	(ON) - OFF (with lamp)	05	ON - OFF	06	(ON) - OFF	07	ON-OFF (with lamp)	08	(ON)-OFF (with lamp)	<table border="1"> <tr><td>G</td><td>Gray</td></tr> <tr><td>W</td><td>White</td></tr> <tr><td>K</td><td>Black</td></tr> </table>	G	Gray	W	White	K	Black	<table border="1"> <tr><td>G</td><td>Gray</td></tr> <tr><td>W</td><td>White</td></tr> <tr><td>K</td><td>Black</td></tr> </table>	G	Gray	W	White	K	Black	<table border="1"> <tr><td>G</td><td>Gray</td></tr> <tr><td>W</td><td>White</td></tr> <tr><td>K</td><td>Black</td></tr> <tr><td>O</td><td>Orange</td></tr> <tr><td>R</td><td>Red</td></tr> <tr><td>Y</td><td>Yellow(illu)</td></tr> <tr><td>M</td><td>Green(illu)</td></tr> <tr><td>D</td><td>Red(illu)</td></tr> <tr><td>F</td><td>Blue(illu)</td></tr> </table>	G	Gray	W	White	K	Black	O	Orange	R	Red	Y	Yellow(illu)	M	Green(illu)	D	Red(illu)	F	Blue(illu)	<table border="1"> <tr><td>0</td><td>No lamp</td></tr> <tr><td>1</td><td>125V AC</td></tr> <tr><td>2</td><td>250V AC</td></tr> <tr><td>3</td><td>12V DC</td></tr> <tr><td>4</td><td>24V DC</td></tr> </table>	0	No lamp	1	125V AC	2	250V AC	3	12V DC	4	24V DC	<table border="1"> <tr><td>C</td><td>4 Safety Approvals</td></tr> <tr><td>E</td><td>None Approvals</td></tr> </table>	C	4 Safety Approvals	E	None Approvals
01	ON - OFF																																																																	
02	(ON) - OFF																																																																	
03	ON-OFF (with lamp)																																																																	
04	(ON) - OFF (with lamp)																																																																	
05	ON - OFF																																																																	
06	(ON) - OFF																																																																	
07	ON-OFF (with lamp)																																																																	
08	(ON)-OFF (with lamp)																																																																	
G	Gray																																																																	
W	White																																																																	
K	Black																																																																	
G	Gray																																																																	
W	White																																																																	
K	Black																																																																	
G	Gray																																																																	
W	White																																																																	
K	Black																																																																	
O	Orange																																																																	
R	Red																																																																	
Y	Yellow(illu)																																																																	
M	Green(illu)																																																																	
D	Red(illu)																																																																	
F	Blue(illu)																																																																	
0	No lamp																																																																	
1	125V AC																																																																	
2	250V AC																																																																	
3	12V DC																																																																	
4	24V DC																																																																	
C	4 Safety Approvals																																																																	
E	None Approvals																																																																	
					T Quick connect tab type																																																													

Option of switch function

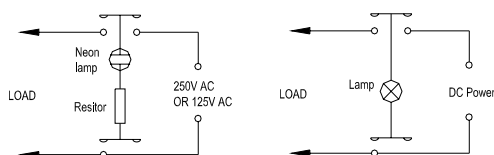
Item No	POLES&THROWS	Push button position ():Momentary		
		Down	Center	Up
				
LC8301	SPST	ON	None	OFF
LC8302	SPST	(ON)	None	OFF
LC8303	SPST(with lamp)	ON	None	OFF
LC8304	SPST(with lamp)	(ON)	None	OFF
LC8305	DPST	ON	None	OFF
LC8306	DPST	(ON)	None	OFF
LC8307	DPST(with lamp)	ON	None	OFF
LC8308	DPST(with lamp)	(ON)	None	OFF

Dimension

Panel cut out


Z	Y	X
0.70~1.25	12.90~13.00	19.10~19.20
1.25~2.00	12.90~13.00	19.30~19.40
2.00~3.00	12.90~13.00	19.50~19.60

Circuit of switch with lamp

Circuits for LC8303, LC8304



Circuits for LC8307, LC8308

