


SPECIFICATIONS

- POLE-POSITION** : Momentary Type, SPST with LED
- CONTACT RATING** : 30V DC,0.1A
- CONTACT RESISTANCE** : 50mΩ max. 1.5V DC ; 100mA,
by Method of Voltage DROP
- INSULATION RESISTANCE** : 100 MΩ min. 500V DC
- DIELECTRIC STRENGTH** : 500V AC for 1 Minute
- OPERATING FORCE** : 250±100gf
- OPERATING LIFE** : 50,000 cycles
- OPERATING TEMPERATURE RANGE** : -40°C ~ 85°C
- TOTAL TRAVEL** : 1.2±0.3mm



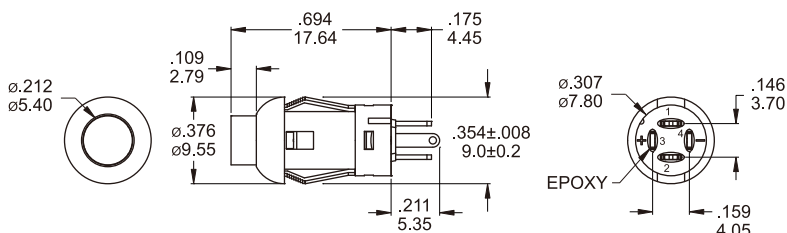

Materials

- CAP** : PC
- CASE & HOUSING** : Nylon 6/6
- TERMINALS** : Copper alloy with gold plated.


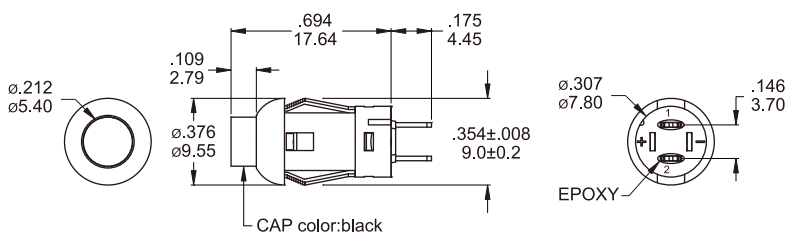

HOW TO ORDER
MODEL NO. **LED COLOR**
PBL ———— 

Led color


ITEM NO	COLOR
01	White
03	Red
05	Yellow
06	Green
07	Blue
76	Blue (Green)

PCB MOUNTING & CIRCUIT DIAGRAM
PCB mounting

Single LED

Dual colors LED


Part No. Shown : PBL-XX

PANEL MOUNTING

Non-LED


Part No. Shown : PBL-A2

PANEL MOUNTING


Circuit Diagram