
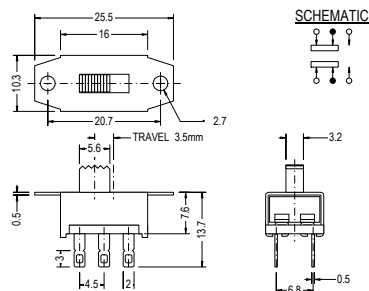


Slide Switch SS Series


SS22G08



SPECIFICATION

- Circuit : ON-ON (2P2T)
- Rating : D.C. 50V 0.5A
- Contact R.[max] : D.C. 5V 1A 30m
- Insulation R.[min] : D.C. 500V 100M
- Withstand VOL. : A.C. 500V 1minute
- Operating force : 300 100g
- Timing : Non Shorting
- Life cycle[max] : 10,000 CYCLES


SS22H05




SPECIFICATION

- Circuit : ON-ON(2P2T)
- Rating : D.C. 50V 0.3A
- Timing : Non Shorting

P.C.B. HOLE DETAIL




SS22H06




SPECIFICATION

- Circuit : ON-ON(2P2T)
- Rating : D.C. 50V 0.3A
- Timing : Non Shorting


P.C.B. HOLE DETAIL



SS23D03




(SS-202-23)

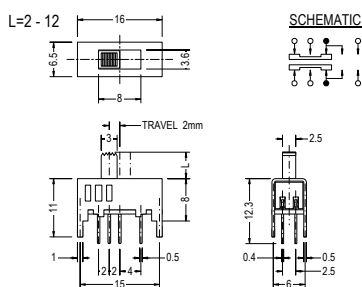


SPECIFICATION

- Circuit : ON-ON-ON(2P3T)
- Rating : D.C. 50V 0.3A
- Timing : Shorting

P.C.B. HOLE DETAIL



SS23D05



SPECIFICATION

- Circuit : ON-ON-ON(2P3T)
- Rating : D.C. 50V 0.3A
- Timing : Shorting

P.C.B. HOLE DETAIL

