



Tilt Switch Ball Rolling Switch BT Series



Specifications

Electrical Rating : 1~50mA /1.5~24VDC
 Electrical Life: >100,000 Cycles
 Contact Resistance: 300mΩ
 Solder Temperature: 250°C 3 Seconds
 Ambient Temperature: 0°C~100°C



Material

Canister: Copper Shell Nickel Plated
 Electrode: Copper Gold Plated
 Rolling Ball: Stainless Steel Gold Plated
 Insulated Piece: Nylon 46(94V-0)



BT411 (Nickel Shell Coating)

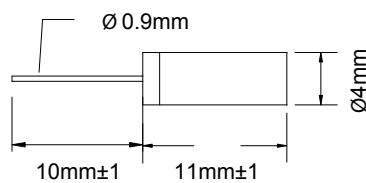

BT411 -2


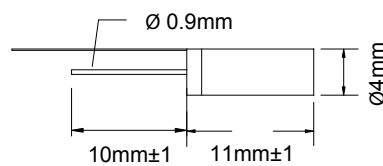


BT411 -3


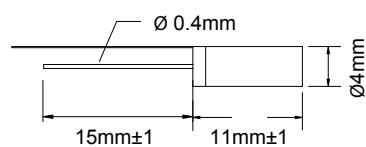






BT512-3

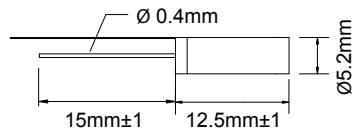

BT514



BT514-2

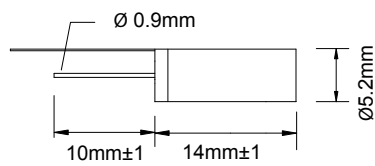

BT514-3

